


DATA SHEET

Vibrating Tables

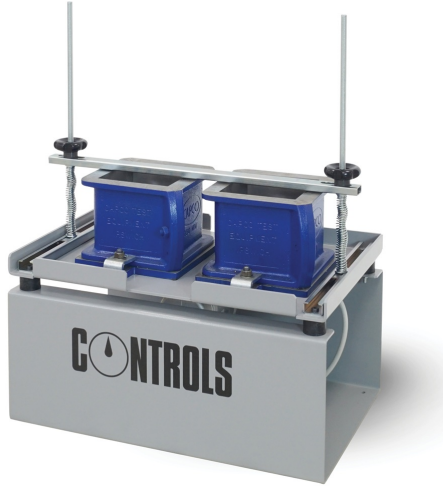

55-C0158/A with 55-C0158/A1 clamping device and two 150 mm cube moulds.

General description

Robustly manufactured to operate with minimum noise levels, these tables operate at 3000 vibrations per minute at 50 Hz or 3600 at 60 Hz and have retaining edges to avoid the moulds from falling from the table.

All models can be completed with clamping device, pedal switch and multi-function control panel (see Accessories).

Main features

- Clamping devices: new universal and practical system, easy to mount and increased adaptability in accordance with the moulds used
- Waterproof pedal: with electrical switch
- Multi-function control panel: 60 seconds timer and ON/OFF switch

Standards


- EN 12390-2

Specifications

Models 55-	C0158/A C0158/AY C0158/AZ	C0158/B C0158/BY C0158/BZ	C0158/C C0158/CY C0158/CZ
Dimensions mm	630x400	830x830	1250x700
Vibration/min @ 50Hz @ 60 Hz	3000 3600	3000 3600	3000 3600
Power W	180	180	2x180

DATA SHEET

Weight approx. kg	33	69	91
-------------------	----	----	----

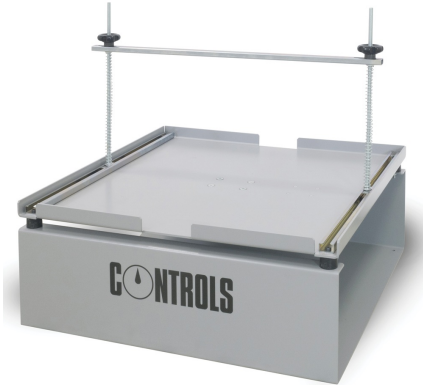

55-C0158/B with one 55-C0158/B1 clamping device



55-C0158/TIME Control panel with 1-minute timer

Products

55-C0158/A

Vibrating table 630x400 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 230V,50Hz,1ph

55-C0158/AY

Vibrating table 630x400 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 220V,60Hz,1ph

55-C0158/AZ

Vibrating table 630x400 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 110V,60Hz,1ph

55-C0158/B

Vibrating table 830x830 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 230V,50Hz,1ph

55-C0158/BY

Vibrating table 830x830 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 220V,60Hz,1ph

55-C0158/BZ

DATA SHEET

Vibrating table 830x830 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 110V,60Hz,1ph

55-C0158/C

Vibrating table 1250x700 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 230V,50Hz,1ph

55-C0158/CY

Vibrating table 1250x700 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 220V,60Hz,1ph

55-C0158/CZ

Vibrating table 1250x700 mm for concrete moulds with retaining edges. Universal clamping brackets, waterproof pedal switch, ON/OFF and timer control panel available as options. 110V,60Hz,1ph

Accessories and consumables

55-C0158/A1

Clamping device suitable for rail locking system of vibrating table series 55-C0158/Ax

55-C0158/B1

Clamping device suitable for rail locking system of vibrating table series 55-C0158/Bx

55-C0158/P

Waterproof pedal switch for vibrating tables series 55-C0158/Ax, 55-C0158/Bx and 55-C0158/Cx. 110-230V/50-60Hz/1Ph

55-C0158/TIME

Control panel for vibrating tables series 55-C0158/Ax, 55-C0158/Bx and 55-C0158/Cx: 60 seconds timer and on/off switch.

55-C0158/C1

Clamping device for 55-C0158/Cx.

Weight: 8 kg.