


DATA SHEET

Automatic Flexure/Tension Machine

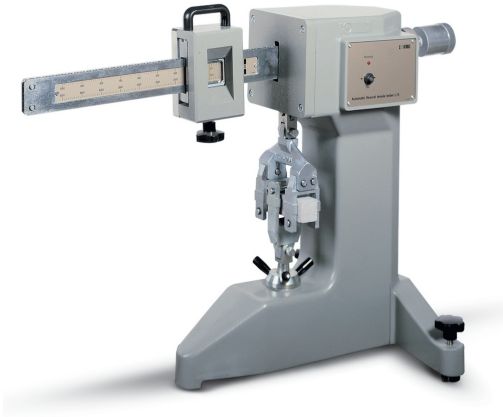

65-L0015/A

Descripción General

This machine is used for the flexural strength determination of cement specimens 40.1x40x160 mm and tensile tests on cement briquettes. It consists of a beam loading system with a travelling weight driven by an electric motor providing a constant increase in load throughout the test. The machine is designed to accept either flexural or tensile attachments which have to be ordered separately as accessories.

- Wattage: 40 W
- Dimensions: 510x1050x720 mm
- Weight approx.: net 52 kg

Características Principales

- Constant rate of loading
- Dual range
- Automatic stop at failure
- Accepts flexural or briquette specimens
- Single lever loading assures high accuracy

Normativas

- EN 196-1
- ASTM C348
- ASTM C349

DATA SHEET



65-L0016



Productos

65-L0015/A

Automatic flexure/tension machine. 5 kN cap. 230V, 50Hz, 1ph.

65-L0015/AY

Automatic flexure/tension machine. 5 kN cap. 220V, 60Hz, 1ph.

65-L0015/AZ

Automatic flexure/tension machine. 5 kN cap. 110V, 60Hz, 1ph.

Accesorios y Consumibles

65-L0015/1

Flexure attachment NF-DIN-UNI-EN

65-L0015/4

Tensile attachment for briquette

65-L0015/5

Flexure testing attachment ASTM

65-L0016

Briquette mould